

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

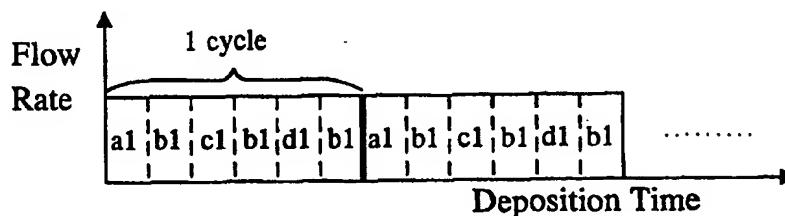
(51) International Patent Classification ⁷ : H01L	A2	(11) International Publication Number: WO 00/16377 (43) International Publication Date: 23 March 2000 (23.03.00)
(21) International Application Number: PCT/KR99/00534 (22) International Filing Date: 10 September 1999 (10.09.99) (30) Priority Data: 1998-37257 10 September 1998 (10.09.98) KR 1998-48993 16 November 1998 (16.11.98) KR (71) Applicant (for all designated States except US): GENITECH CO., LTD. [KR/KR]; 1694-5, Shinil-dong, Taedeok-gu, Taejon 306-230 (KR). (72) Inventors; and (75) Inventors/Applicants (for US only): YI, Kyoung-Soo [KR/KR]; 118-1506 Hanbit Apt., 99, Uheun-dong, Yusong-gu, Taejon 305-333 (KR). KOH, Won-Yong [KR/KR]; 105-605 Hanul Apt. 160-1, Shinsung-dong, Yusong-gu, Taejon 305-345 (KR). KANG, Sang-Won [KR/KR]; 133-1506 Hanbit Apt.; 99, Uheun-dong, Yusong-gu, Taejon 305-333 (KR). (74) Agent: HUH, Jin-Seok; J.S. Huh Patent Office, 206 Sungji Building, 1338-22, Seocho-dong, Seocho-ku, Seoul 137-070 (KR).	(81) Designated States: JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>Without international search report and to be republished upon receipt of that report.</i>	

(54) Title: METHOD FOR FORMING A THREE-COMPONENT NITRIDE FILM CONTAINING METAL AND SILICON

(57) Abstract

A method for forming a three-component film containing metal, silicon and nitrogen for use in semiconductor devices on a substrate. The method of the present invention comprises the steps of: preparing separate reactive gases each including at least one selected from the group consisting of a gaseous metal compound, a gaseous silicon compound and an ammonia gas under conditions such that the gaseous metal compound and the ammonia gas does not form a mixture;

determining a sequential gas supply cycle of the reactive gases so that supplies of the gaseous metal compound, the gaseous silicon compound and the ammonia gas are each included at least once within one gas supply cycle; and applying the reactive gases to the substrate by repeating the gas supply cycle at least once. According to the present invention, a three-component nitride film can be formed with a uniform thickness despite unevenness of a semiconductor substrate surface.



a1 : Ar carrier gas bubbled in tetrakisdimethylamidotitanium

b1 : Ar gas

c1 : ammonia gas

d1 : silane gas

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

METHOD FOR FORMING A THREE-COMPONENT NITRIDE FILM CONTAINING METAL AND SILICON

TECHNICAL FIELD

5 The present invention relates to a method for forming a film, and more particularly, to a method for forming a compound film of uniform thickness containing metal, silicon, and nitrogen for use in semiconductor devices on a substrate.

10 BACKGROUND ART

 In the manufacture of semiconductor devices, a sputtered film of titanium nitride (TiN) is currently used as a diffusion barrier metal to prevent the diffusion of a metal interconnect into a silicon single crystal or an insulating layer. Additionally, the TiN is also used as a glue layer material to enhance adhesion when tungsten is used
15 for forming an interconnect structure. However, a TiN film formed by sputtering or chemical deposition tends to have a columnar crystal structure, causing a problem that the metal interconnect material easily diffuses along its grain boundary. If a tungsten layer is formed on a TiN glue layer, the tungsten source gas WF_6 also easily diffuses along the grain boundary of the TiN layer to cause damage to the TiN glue
20 layer.

 Such problems can be alleviated by using a nano-crystalline material with extremely small grains or an amorphous material as a diffusion barrier material. A three-component nitride containing silicon and a refractory metal such as titanium, tantalum or tungsten is promising for such material.

25 With the trend to continue to miniaturize semiconductor integrated circuits to achieve submicron feature sizes, the width of an interconnect line becomes smaller and the aspect ratio of a contact hole becomes higher. Sputtering method is inadequate to form a film of a uniform thickness on such a structure because the method has a certain directivity. Accordingly, it is required that a uniform film of
30 about 10nm thickness is formed on a surface having holes of high-aspect ratio, that is, on an extremely uneven surface even using other deposition methods. Although chemical deposition is typically used to form a uniform thickness film, good step

coverage can not be obtained under a chemical deposition condition that deposition sources react violently in gas phases. Particularly in the case of using alkylamido metal compound to chemically deposit a metal nitride film, the deposited metal nitride film has a bad step coverage due to the reaction between gaseous alkylamido metal compound and ammonia gas.

Unlike conventional chemical deposition methods where thin film sources are simultaneously supplied on a substrate, the sequential deposition method where the sources are sequentially supplied on a substrate enables formation of a uniform thickness thin film because it can be formed only by chemical reaction of the substrate surface. This method is well described in the following book; T. Suntola and M. Simpson eds., *Atomic Layer Epitaxy*, Blackie, London, 1990. However, the applications of this method have been limited to the formation of a two component film or a composite oxide film containing more than three components.

DISCLOSURE OF INVENTION

Accordingly, it is an object of the present invention to provide a method for forming a three-component nitride film containing metal and silicon for use in a barrier layer which effectively prevents the diffusion of metal interconnects of semiconductor devices.

Another object of the present invention is to provide a process by which a three-component nitride film containing metal and silicon is formed with a uniform thickness despite unevenness of a semiconductor substrate surface.

In order to accomplish the aforementioned object, the present invention provides a method for forming a three-component nitride film containing metal and silicon on a substrate, the method comprising the steps of: (a) preparing separate reactive gases each including at least one selected from the group consisting of a gaseous metal compound, a gaseous silicon compound and an ammonia gas under conditions such that the gaseous metal compound and the ammonia gas does not form a mixture; (b) determining a sequential gas supply cycle of the reactive gases so that supplies of the gaseous metal compound, the gaseous silicon compound and the ammonia gas are each included at least once within one gas supply cycle; and (c) applying the reactive gases to the substrate by repeating the gas supply cycle at least

once.

The reactive gases include only five types of gases such as a gaseous metal compound, a gaseous silicon compound, an ammonia gas, a mixture of a gaseous metal compound and a gaseous silicon compound, a mixture of a gaseous silicon compound and an ammonia gas because gaseous metal compound and the ammonia gas react each other thus should not form a mixture.

BRIEF DESCRIPTION OF DRAWINGS

FIGS. 1A to 1C are graphs showing the gas supply cycles regardless of absolute magnitude in flow rate and deposition time according to the embodiments of the present invention.

BEST MODE FOR CARRYING OUT THE INVENTION

In the embodiment of the present invention, various gas supply cycles can be determined as follows.

First, between the supplies of the reactive gases, supplies of a gas not reacting with any of the reactive gases are inserted. The respective reactive gas supplies of a gaseous metal compound, a gaseous silicon compound and an ammonia gas are preferably arranged in a cyclic permutation order, and supplies of a gas not reacting any of the three component gases are inserted therebetween. For example, the supply cycle may be determined to be "gaseous metal compound→non-reacting gas→gaseous silicon compound→non-reacting gas→ammonia gas→non-reacting gas" or "gaseous metal compound→non-reacting gas→ammonia gas→non-reacting gas→gaseous silicon compound→non-reacting gas", respectively. In the chemical deposition, such a supply cycle is repeated to form a film of desired thickness.

Second, because the reactive gases include gas mixtures, the respective supplies of reactive gases containing a gaseous metal compound and an ammonia gas are arranged within the supply cycle and supplies of a gas not reacting with any of the two reactive gases are inserted therebetween. Here, the reactive gas containing a metal compound may be a sole gaseous metal compound or a mixture of a gaseous metal compound and a gaseous silicon compound. Additionally, the same may be a reactive gas containing an ammonia gas. In this case, the supply cycle may be

determined, for example, to be "mixture of a gaseous metal compound and a gaseous silicon compound→non-reacting gas→ammonia gas→non-reacting gas", "gaseous metal compound→non-reacting gas→mixture of an ammonia gas and a gaseous silicon compound→non-reacting gas", or "mixture of a gaseous metal compound and a gaseous silicon compound→non-reacting gas→mixture of an ammonia gas and a gaseous silicon compound→non-reacting gas", respectively. In the above methods of determining supply cycle, the non-reacting gas is supplied to prevent the reaction of reactive gases.

Third, a gaseous silicon compound, instead of a non-reacting gas, may be used to prevent the vapor reaction between a gaseous metal compound and an ammonia gas. Accordingly, the supply cycle is determined by inserting a gaseous silicon compound between the respective supplies of the reactive gases containing a metal compound and ammonia. For example, the respective reactive gas supplies of a gaseous metal compound, a gaseous silicon compound and an ammonia gas are arranged in a cyclic permutation order, and supplies of a gaseous silicon compound are inserted therebetween. That is, the supply cycle may be "gaseous metal compound→gaseous silicon compound→ammonia gas→gaseous silicon compound". Instead of the above supply cycle, the supply cycle may be "mixture of a gaseous metal compound and a gaseous silicon compound→gaseous silicon compound→ammonia gas→gaseous silicon compound", "gaseous metal compound→gaseous silicon compound→mixture of an ammonia gas and a gaseous silicon compound→gaseous silicon compound", or "mixture of a gaseous metal compound and a gaseous silicon compound→gaseous silicon compound→mixture of an ammonia gas and a gaseous silicon compound→gaseous silicon compound". As described above, the supplies of reactive gases, such as a gaseous silicon compound, not reacting with other reactive gases can be inserted between the supplies of other reactive gases to prevent vapor phase reactions.

Fourth, the supply cycles can be differently determined to control the stoichiometric composition of a film during the deposition. The desired control of stoichiometric composition provides better matches of physical properties between the deposited film and the upper/lower layers thereof. Such physical properties

include a contact resistance, a step coverage, etc. For example, in the case of depositing a three-component nitride film containing titanium and silicon on a silicon-rich underlayer, a silicon-rich film (Ti_xSi_yN , $x < y$) is deposited in the early stage of deposition to provide low contact resistance and then a titanium-rich film (Ti_xSi_yN , $x > y$) is deposited in the late stage of deposition to reduce the film resistance itself.

In order to form such a film, the supply cycle is determined to include supplies of gaseous silicon compound more than those of gaseous metal compound in the early stage of deposition whereas it is determined to include supplies of gaseous metal compound more than those of gaseous silicon compound in the late stage of deposition. For example, the supply cycle is determined to be "Si-N-Si-N-Ti-N-" in the early stage of deposition, "Si-N-Ti-N-" in the middle stage of deposition, "Si-N-Ti-N-Ti-N-" in the late stage of deposition, wherein Si is a gaseous silicon compound, N is an ammonia gas, and Ti is a gaseous titanium compound. In the above supply cycle, notation of non-reacting gas, which is supplied between the supplies of reactive gases, was omitted.

In some cases, the supply cycle may be "Si-N-Ti-N-Ti-N-Ti-N-Ti-N-Ti-N-" to lower the overall content of silicon in a deposited film while maintaining constant composition of silicon. In the embodiments, the metal included in the metal compound is preferably a refractory metal, and more preferably, the refractory metal is titanium, tantalum, or tungsten. Additionally, the metal compound may be an organometallic compound or a halogenated metallic compound. In the case of using an organometallic compound, it is preferably an amido or imido compound of a metal. More preferably, the amido compound of a metal is an amidotitanium compound and most preferably the amidotitanium compound is tetrakisdimethylamidotitanium or tetrakisdiethylamidotitanium.

Likewise, for example, if tantalum tris-diethylamido-t-butylimide is used as a metal source, a three-component nitride film containing tantalum and silicon can be obtained.

The silicon compound is preferably a compound comprised of hydrogen and silicon, which is represented by Si_nH_{2n+2} , wherein n is a natural number of not more than 5. Preferably, the non-reacting gas is H_2 , He, N_2 , or Ar.

In the chemical deposition step, the temperature of the substrate is preferably maintained lower than the thermal decomposition temperature of the metal compound to prevent the formation of a film with poor step coverage due to vapor phase reaction.

5 The present invention will be further described in the following examples and will be compared with other examples, but the present invention should not be construed as being limited thereto.

 All the reactions were carried out in a reactor made of stainless steel. The pressure in the reactor during the deposition was 1 Torr, while the temperature of a
10 silicon substrate contained in the reactor was maintained at 180°C. Tetrakisdimethylamidotitanium, a metallic source, was fed to the reactor by bubbling an argon carrier gas at a temperature of 25°C. The temperature of gas supply line was maintained at 100°C to prevent the condensation of the metallic source.

15 [example 1]

 The cycle was comprised of sequential supplies of an argon carrier gas bubbled in tetrakisdimethylamidotitanium at a flow rate of 100 sccm for 5 seconds, an argon gas at a flow rate of 100sccm for 10 seconds, an ammonia gas at a flow rate of
143 sccm for 5 seconds, an argon gas at a flow rate of 100 sccm for 10 seconds, a
20 silane (SiH₄) gas at a flow rate of 38sccm for 5 seconds, and an argon gas at a flow rate of 100 sccm for 10 seconds. The cycle was repeated by 200 times, as shown in FIG. 1A. Auger spectrum analysis of the deposited film indicated compositions of titanium, nitrogen, silicon, carbon, and oxygen with their specific peaks.

25 [example 2]

 The cycle was comprised of sequential supplies of an argon carrier gas bubbled in tetrakisdimethylamidotitanium at a flow rate of 91 sccm mixed with a silane gas at a flow rate of 9sccm for 5 seconds, an ammonia gas at a flow rate of 143
sccm for 5 seconds, and an argon gas at a flow rate of 100 sccm for 10 seconds. The
30 cycle was repeated by 200 times, as shown in FIG. 1B. Auger spectrum analysis of the deposited film indicated compositions of titanium, nitrogen, silicon, carbon, and oxygen with their specific peaks.

[example 3]

The cycle was comprised of sequential supplies of an argon carrier gas bubbled in tetrakisdimethylamidotitanium at a flow rate of 100 sccm for 5 seconds, an argon gas at a flow rate of 100 sccm for 10 seconds, an ammonia gas at a flow rate of 13 sccm mixed with a silane gas at a flow rate of 38 sccm for 5 seconds, and an argon gas at a flow rate of 100 sccm for 10 seconds. The cycle was repeated by 200 times, as shown in FIG. 1C. Auger spectrum analysis of the deposited film indicated compositions of titanium, nitrogen, silicon, carbon, and oxygen with their specific peaks.

[comparative example 1]

The cycle was comprised of sequential supplies of an argon carrier gas bubbled in tetrakisdimethylamidotitanium at a flow rate of 100 sccm for 5 seconds, an argon gas at a flow rate of 100 sccm for 10 seconds, a silane gas at a flow rate of 38 sccm for 5 seconds, and an argon gas at a flow rate of 100 sccm for 10 seconds. The cycle was repeated by 200 times, and no film, however, was formed on the silicon substrate.

[comparative example 2]

The cycle was comprised of sequential supplies of an ammonia gas at a flow rate of 143 sccm for 5 seconds, an argon gas at a flow rate of 100 sccm for 10 seconds, a silane gas at a flow rate of 38 sccm for 5 seconds, and an argon gas at a flow rate of 100 sccm for 10 seconds. The cycle was repeated by 200 times, and no film, however, was formed on the silicon substrate.

The comparative examples show that reactive gases of a gaseous metal compound, a gaseous silicon compound and an ammonia gas each should be included at least once within the gas supply cycle to form a three-component nitride film containing metal and silicon.

WHAT IS CLAIMED IS :

1. A method for forming a three-component nitride film containing metal and silicon on a substrate, said method comprising the steps of:
 - 5 (a) preparing separate reactive gases each including at least one selected from the group consisting of a gaseous metal compound, a gaseous silicon compound and an ammonia gas under conditions such that the gaseous metal compound and the ammonia gas do not form a mixture;
 - (b) determining a sequential gas supply cycle of said reactive gases so that supplies
10 of said gaseous metal compound, said gaseous silicon compound and said ammonia gas are each included at least once within one gas supply cycle; and
 - (c) applying said reactive gases to said substrate by repeating said gas supply cycle at least once.
- 15 2. The method of claim 1, wherein said one gas supply cycle comprises supplies of a gas not reacting with any of said reactive gases, each supply being inserted between the supplies of said reactive gases.
3. The method of claim 2, wherein the respective supply cycles are determined to
20 include different times of reactive gas supplies to change the stoichiometric composition of said three-component nitride film, providing better matches of physical properties between said three-component nitride film and the upper/lower layers thereof.
- 25 4. The method of claim 3, wherein said chemical vapor deposition step is conducted by repeating supply cycles, said supply cycles each including relatively more gaseous silicon compound supplies in the early stage of said deposition step while said supply cycles each including relatively more gaseous metal compound supplies in the late stage of said deposition step, to reduce the contact resistance between said three-
30 component nitride film and the upper/lower layers thereof.
5. The method of claim 2, wherein, within said one supply cycle, the respective

supplies of a gaseous metal compound, a gaseous silicon compound and an ammonia gas are arranged in a cyclic permutation order, supplies of a gas not reacting any of the three component gases being inserted between said reactive gas supplies.

5 6. The method of claim 1, wherein, within said one supply cycle, the respective supplies of reactive gases containing a gaseous metal compound and an ammonia gas are arranged, supplies of a gas not reacting with any of said two reactive gases being inserted therebetween.

10 7. The method of claim 1, wherein, within said one supply cycle, the respective supplies of reactive gases containing a gaseous metal compound and an ammonia gas are arranged, supplies of a gaseous silicon compound being inserted therebetween.

15 8. The method of claim 1, wherein, within said one supply cycle, the respective supplies of a gaseous metal compound, a gaseous silicon compound and an ammonia gas are arranged in a cyclic permutation order, supplies of a gaseous silicon compound being inserted therebetween.

20 9. The method of claim 1, wherein said metal is selected from the refractory metal group consisting of titanium, tantalum and tungsten.

10. The method of claim 1, wherein said metal compound is an organometallic compound.

25 11. The method of claim 1, wherein said metal compound is a halogenated metallic compound.

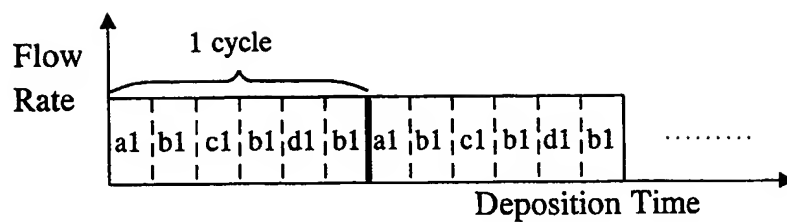
12. The method of claim 10, wherein said organometallic compound includes at least one amido or imido group.

30

13. The method of claim 12, wherein said amido-metallic compound is an amido-titanium compound.

14. The method of claim 13, wherein said amido-titanium compound is tetrakisdimethylamidotitanium or tetrakisdialkylamidotitanium..
- 5 15. The method of claim 12, wherein said organometallic compound is tantalum tris-diethylamido-t-butylimide.
16. The method of claim 1, wherein said silicon compound is a compound comprised of hydrogen and silicon, which is represented by $\text{Si}_n\text{H}_{2n+2}$, wherein n is a
10 natural number of not more than 5.
17. The method of claim 2, wherein said non-reacting gas is selected from the group consisting of H_2 , He, N_2 , and Ar.
- 15 18. The method of claim 1, wherein the temperature of said substrate is maintained lower than the thermal decomposition temperature of said metal compound during chemical deposition.

1/1

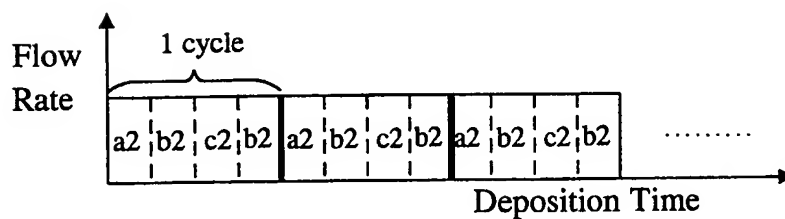
FIG. 1A

a1 : Ar carrier gas bubbled in tetrakisdimethylamidotitanium

b1 : Ar gas

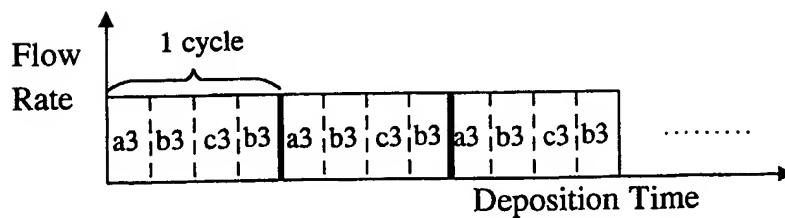
c1 : ammonia gas

d1 : silane gas

FIG. 1Ba2 : Ar carrier gas bubbled in tetrakisdimethylamidotitanium
mixed with silane gas

b2 : Ar gas

c2 : ammonia gas

FIG. 1C

a3 : Ar carrier gas bubbled in tetrakisdimethylamidotitanium

b3 : Ar gas

c3 : mixture of ammonia gas and silane gas

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : C23C 14/06, 16/44	A3	(11) International Publication Number: WO 00/16377 (43) International Publication Date: 23 March 2000 (23.03.00)
(21) International Application Number: PCT/KR99/00534 (22) International Filing Date: 10 September 1999 (10.09.99) (30) Priority Data: 1998-37257 10 September 1998 (10.09.98) KR 1998-48993 16 November 1998 (16.11.98) KR (71) Applicant (for all designated States except US): GENITECH CO., LTD. [KR/KR]; 1694-5, Shinil-dong, Taedeok-gu, Taejon 306-230 (KR). (72) Inventors; and (75) Inventors/Applicants (for US only): YI, Kyoung-Soo [KR/KR]; 118-1506 Hanbit Apt., 99, Uheun-dong, Yusong-gu, Taejon 305-333 (KR). KOH, Won-Yong [KR/KR]; 105-605 Hanul Apt. 160-1, Shinsung-dong, Yusong-gu, Taejon 305-345 (KR). KANG, Sang-Won [KR/KR]; 133-1506 Hanbit Apt., 99, Uheun-dong, Yusong-gu, Taejon 305-333 (KR). (74) Agent: HUH, Jin-Seok; J.S. Huh Patent Office, 206 Sungji Building, 1338-22, Seocho-dong, Seocho-ku, Seoul 137-070 (KR).	(81) Designated States: JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report. (88) Date of publication of the international search report: 8 June 2000 (08.06.00)	
<p>(54) Title: METHOD FOR FORMING A THREE-COMPONENT NITRIDE FILM CONTAINING METAL AND SILICON</p> <p>(57) Abstract</p> <p>A method for forming a three-component film containing metal, silicon and nitrogen for use in semiconductor devices on a substrate. The method of the present invention comprises the steps of: preparing separate reactive gases each including at least one selected from the group consisting of a gaseous metal compound, a gaseous silicon compound and an ammonia gas under conditions such that the gaseous metal compound and the ammonia gas does not form a mixture; determining a sequential gas supply cycle of the reactive gases so that supplies of the gaseous metal compound, the gaseous silicon compound and the ammonia gas are each included at least once within one gas supply cycle; and applying the reactive gases to the substrate by repeating the gas supply cycle at least once. According to the present invention, a three-component nitride film can be formed with a uniform thickness despite unevenness of a semiconductor substrate surface.</p> <div style="display: flex; align-items: flex-start;"> <div style="flex: 1;"> <p style="margin-top: 10px;">a1 : Ar carrier gas bubbled in tetrakisdimethylamidotitanium b1 : Ar gas c1 : ammonia gas d1 : silane gas</p> </div> <div style="flex: 1; padding-left: 20px;"> <p>(57) Abstract</p> <p>A method for forming a three-component film containing metal, silicon and nitrogen for use in semiconductor devices on a substrate. The method of the present invention comprises the steps of: preparing separate reactive gases each including at least one selected from the group consisting of a gaseous metal compound, a gaseous silicon compound and an ammonia gas under conditions such that the gaseous metal compound and the ammonia gas does not form a mixture; determining a sequential gas supply cycle of the reactive gases so that supplies of the gaseous metal compound, the gaseous silicon compound and the ammonia gas are each included at least once within one gas supply cycle; and applying the reactive gases to the substrate by repeating the gas supply cycle at least once. According to the present invention, a three-component nitride film can be formed with a uniform thickness despite unevenness of a semiconductor substrate surface.</p> </div> </div>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

INTERNATIONAL SEARCH REPORT

International application No.
PCT/KR 99/00534

A. CLASSIFICATION OF SUBJECT MATTER

IPC⁷: C 23 C 14/06, 16/44

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC⁷: C 23 C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

QUESTEL-WPI, EPO-WPI

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 02-274867 A (SEIKO INSTR. INC.) 09 November 1990 (09.11.90) (abstract). [online] [retrieved on 11 February 2000 (11.02.00)]. Retrieved from: EPO WPI-Database. ----	1-18

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

„A“ document defining the general state of the art which is not considered to be of particular relevance

„E“ earlier application or patent but published on or after the international filing date

„L“ document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

„O“ document referring to an oral disclosure, use, exhibition or other means

„P“ document published prior to the international filing date but later than the priority date claimed

„T“ later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

„X“ document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

„Y“ document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

„&“ document member of the same patent family

Date of the actual completion of the international search

11 February 2000 (11.02.00)

Date of mailing of the international search report

08 March 2000 (08.03.00)

Name and mailing address of the ISA/AT

Austrian Patent Office
Kohlmarkt 8-10; A-1014 Vienna
Facsimile No. 1/53424/200

Authorized officer

Beck

Telephone No. 1/53424/134

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/KR 99/00534

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
JP	A2	2274867	09-11-1990	none	

POWERED BY **Dialog****Basic Patent (Number,Kind,Date):** WO 200016377 A2 20000323**Patent Family:**

Patent Number	Kind	Date	Application Number	Kind	Date
EP 1044288	A2	20001018	EP 99941865	A	19990910
WO 200016377	A2	20000323	WO 99KR534	A	19990910 (Basic)
WO 200016377	A3	20000608	WO 99KR534	A	19990910

Priority Data:

Patent Number	Kind	Date
WO 99KR534	W	19990910
KR 9837257	A	19980910
KR 9848993	A	19981116

PATENT FAMILY:**European Patent Office (EP)**

Patent (Number,Kind,Date): EP 1044288 A2 20001018

METHOD FOR FORMING A THREE-COMPONENT NITRIDE FILM CONTAINING METAL AND SILICON (English; French; German)

Patent Assignee: GENITECH CO LTD (KR)

Author (Inventor): YI KYOUNG-SOO (KR); KOH WON-YONG (KR); KANG SANG-WON (KR)

Priority (Number,Kind,Date): WO 99KR534 W 19990910; KR 9837257 A 19980910; KR 9848993 A 19981116

Applic (Number,Kind,Date): EP 99941865 A 19990910

Designated States: (National) AT; BE; CH; CY; DE; DK; ES; FI; FR; GB; GR; IE; IT; LI; LU; MC; NL; PT; SE

IPC: * C23C-014/06; C23C-016/44

CA Abstract No: * 132(17)230668X

Derwent WPI Acc No: * C 2000-271646

Language of Document: English

European Patent Office (EP) - Legal Status

Number	Type	Date	Code	Text	
EP 1044288	P	19980910	EP AA	PRIORITY (PATENT APPLICATION)	(PRIORITAET (PATENTANMELDUNG))
				KR 9837257 A 19980910	
EP 1044288	P	19981116	EP AA	PRIORITY (PATENT APPLICATION)	(PRIORITAET (PATENTANMELDUNG))

EP 1044288	P	19990910	EP AA	KR 9848993 A 19981116 PCT-APPLICATION	(PCT-ANMELDUNG)
				WO 99KR534 W 19990910	
EP 1044288	P	19990910	EP AE	EP-APPLICATION	(EUROPÄISCHE ANMELDUNG)
				EP 99941865 A 19990910	
EP 1044288	P	20001018	EP AK	DESIGNATED CONTRACTING (IN EINER ANMELDUNG OHNE STATES IN AN APPLICATION RECHERCHENBERICHT BENANNTE WITHOUT SEARCH REPORT: VERTRAGSSTAATEN)	
				AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE	
EP 1044288	P	20001018	EP A2	PUBLICATION OF APPLICATION WITHOUT SEARCH REPORT	(VERÖFFENTLICHUNG DER ANMELDUNG OHNE RECHERCHENBERICHT)
EP 1044288	P	20001018	EP 17P	REQUEST FOR EXAMINATION FILED	(PRÜFUNGSANTRAG GESTELLT)
				20000509	

World Intellectual Property Organization, PCT (WO)

Patent (Number,Kind,Date): WO 200016377 A2 20000323

METHOD FOR FORMING A THREE-COMPONENT NITRIDE FILM CONTAINING METAL AND SILICON (English)

Patent Assignee: GENITECH CO LTD (KR); YI KYOUNG SOO (KR); KOH WON YONG (KR); KANG SANG WON (KR)

Author (Inventor): YI KYOUNG-SOO (KR); KOH WON-YONG (KR); KANG SANG-WON (KR)

Priority (Number,Kind,Date): KR 9837257 A 19980910; KR 9848993 A 19981116

Applic (Number,Kind,Date): WO 99KR534 A 19990910

Designated States: (National) JP; US (Regional) AT; BE; CH; CY; DE; DK; ES; FI; FR; GB; GR; IE; IT; LU; MC; NL; PT; SE

Filing Details: WO 300000 Without international search report and to be republished upon receipt of that report

IPC: * H01L

CA Abstract No: ; 132(17)230668X

Derwent WPI Acc No: ; C 2000-271646

Language of Document: English

Patent (Number,Kind,Date): WO 200016377 A3 20000608

METHOD FOR FORMING A THREE-COMPONENT NITRIDE FILM CONTAINING METAL AND SILICON (English)

Patent Assignee: GENITECH CO LTD (KR); YI KYOUNG SOO (KR); KOH WON YONG (KR); KANG SANG WON (KR)

Author (Inventor): YI KYOUNG-SOO (KR); KOH WON-YONG (KR); KANG SANG-WON (KR)

Priority (Number,Kind,Date): KR 9837257 A 19980910; KR 9848993 A 19981116

Applic (Number,Kind,Date): WO 99KR534 A 19990910

Designated States: (National) JP; US (Regional) AT; BE; CH; CY; DE; DK; ES; FI; FR; GB; GR; IE; IT; LU; MC; NL; PT; SE

Filing Details: WO 130000 With international search report; Before expiration of time limit for amending the claims and to be republished in the event of the receipt of the amendments


IPC: * C23C-014/06; C23C-016/44
 CA Abstract No: * 132(17)230668X
 Derwent WPI Acc No: * C 2000-271646
 Language of Document: English

World Intellectual Property Organization, PCT (WO) - Legal Status

Number	Type	Date	Code	Text
WO 200016377	P	19980910	WO AA	PRIORITY (PATENT) KR 9837257 A 19980910
WO 200016377	P	19981116	WO AA	PRIORITY (PATENT) KR 9848993 A 19981116
WO 200016377	P	19990910	WO AE	APPLICATION DATA (APPL. DATA) WO 99KR534 A 19990910
WO 200016377	P	20000323	WO AK	DESIGNATED STATES CITED IN A PUBLISHED APPLICATION WITHOUT SEARCH REPORT (DESIGNATED STATES CITED IN A PUBLISHED APPL. WITHOUT SEARCH REPORT) JP US
WO 200016377	P	20000323	WO AL	DESIGNATED COUNTRIES FOR REGIONAL PATENTS CITED IN A PUBLISHED APPLICATION WITHOUT SEARCH REPORT (DESIGNATED COUNTRIES FOR REGIONAL PATENTS CITED IN A PUBLISHED APPL. WITHOUT SEARCH REPORT) AT BE CH CY DE DK ES FI FR GB GR IE IT LU MC NL PT SE
WO 200016377	P	20000323	WO A2	PUBLICATION OF THE INTERNATIONAL APPLICATION WITHOUT THE INTERNATIONAL SEARCH REPORT (PUB. OF THE INTERNATIONAL APPL. WITHOUT THE INTERNATIONAL SEARCH REPORT)
WO 200016377	P	20000517	WO 121	EP: ALL PREREQUISITES FOR ENTERING THE EUROP. PHASE FULFILED
WO 200016377	P	20000608	WO AK	DESIGNATED STATES CITED IN A SUBSEQUENTLY PUBLISHED SEARCH REPORT JP US
WO 200016377	P	20000608	WO AL	DESIGNATED COUNTRIES FOR REGIONAL PATENTS CITED IN A SUBSEQUENTLY PUBLISHED SEARCH REPORT AT BE CH CY DE DK ES FI FR GB GR IE IT LU MC NL PT SE
WO 200016377	P	20000608	WO A3	SUBSEQUENT PUBLICATION OF THE INTERNATIONAL SEARCH REPORT (SUBSEQUENT PUB. OF THE INTERNATIONAL SEARCH REPORT)

INPADOC/Family and Legal Status

© 2001 European Patent Office. All rights reserved.

 Dialog® File Number 345 Accession Number 15814183